

15" Embedded Touch PC



- Allwinner V40 Cortex™ QuadCore Processor
- 1 GB DDR3 RAM; 8 GB EMMC FLASH
- Cortex™ A7 Chipset
- Full HD Resolution – 1920 x 1080
- Android 4.2, 4.4 & Linux Support, WinCE optional
- Optional Bluetooth & GPS
- Integrated HI-FI 100dB Audio Cadec, 2 x 6W amplifier



Available in two standard versions with just W-LAN or with W-LAN, Bluetooth 4.0 and GPS integrated, POE-plugIn and OTG-port added, it is faytech's most powerful QuadCore solution for Linux and Android projects. Even WinCE-BSPs are available for project partners. Now available in faytech's embedded capacitive TPC series or also as single embedded system. faytech's Embedded Touchscreen Series is the cost effective solution for machine control, automation, and digital signage. By including pre-installed Android 4.2, Android 4.4 or Linux, a powerful Allwinner V40 QuadCore CPU, Mali400MP2 graphics chipset, numerous interfaces such as USB, serial, network, TTL / UART, Mini-PCle, HDMI, VGA, GPIO, LVDS and extended DC-IN, faytech's new Embedded Series is the right choice for reliable, industrial solutions.

Each embedded system comes standard with 1 GB DDR3 RAM and 8 GB flash memory and includes a S-ATA connector as well as SD card slot for further hard disk expansion. Wi-Fi is integrated, and over MiniPCle the systems can be upgraded to 3G + GPS using the available SIM card slot.

The touch features capacitive 10-finger multitouch panels, Anti Glare chemical etched treatment and optional bonded to the LED backlighting panels, backed by faytech's warranty for pixel accuracy (A + quality).

The design of the Embedded Touchscreen series follows the application: flat easy to integrate IP65 front and stable rear housing with VESA-100 mounting for fixing / integration.

faytech 's new Embedded Touchscreen Series is our most cost-effective solution for intelligent machine control, and like all faytech's reliable touch devices built for precision and durability.



HDMI



| | |
|--------------------------|-------------------------------------|
| Product name | 15" Embedded Touch PC |
| Article code / EAN numer | FT15V40M400W1G8GCAP / 6920734015801 |

| LCD Panel | |
|---|--------------|
| IP rating | IP65 |
| Screen diagonal (Inch/cm) | 15/38.10 |
| Display active screen size | 30.40x22.80 |
| Aspect ratio | 4:3 |
| Physical resolution | 1024x768 |
| External Maximum showable resolution - DP | 1920x1080 |
| Colours displayed | 16.2M |
| Brightness (cd/m ²) | 300 |
| Contrast | 700:1 |
| Typical reaction time Tr/ Tf (ms) | 8/8 |
| Visual Angle horizontal/vertical (°) | 160/160 |
| Backlight / Backlight Lifetime (hours) | LED / 40,000 |

| Operation / Mechanical | |
|----------------------------|------------------------|
| Operating Temperature (°C) | -10 ~ +60 |
| Humidity Range (RH) | 10%-90% |
| Net weight (kg) | 4.10 |
| Gross weight (kg) | 5.10 (incl. cartonage) |
| Housing material | ABS |
| Housing (cm) LxWxH | 35.2 x 27.6 x 4.6 |
| Mounting | VESA 100 |

| PC System | |
|-----------------|--|
| CPU | Allwinner® V40 QuadCore |
| Chipset | Cortex A7 |
| Graphic GPU | ARM® Mali400 Mp2 Complies with OpenGL ES 2.0/1.1 |
| Audio | Integrated HI-FI 100dB Audio Codec Dual analog mic, 2x6W amplifier |
| Memory | 1x 1GB DDR3 |
| Storage | 8GB EMMC Flash |
| Network | 10M/100M/1000M Network; W-LAN |
| Driver Support | Android 6.0 / 4.4 (A20: Android 4.4) |
| Preinstalled OS | Android 6.0 / 4.4 (A20: Android 4.4) |

| Touch Panel | |
|-----------------------|--|
| Touch Technology | Projected Capacitive 10-Point Multitouch |
| Touch Connector | USB |
| Touch Panel Drivers | Windows; Linux; Mac; Android |
| Touch Life (Contacts) | Unlimited |
| Surface Hardness | 7H |



| Power | |
|--------------------------|--|
| Power Indicator | Green LED |
| Power Supply | 100-240V ACDC active switching; 12V DC-Out |
| Working Power (V) | 8~18 |
| Power Consumption (W) | 10 |
| Stand-By Consumption (W) | <1 |

| Expansion slots |
|-----------------|
| 1x MiniPCIe |

| Included Accessories |
|----------------------------------|
| Power Supply (see Power section) |
| W-LAN Antenna |
| Short Installation Manual |
| Standard Stand |

| External Connectors |
|---|
| 8-18V DC-IN, screwable |
| 2x USB 2.0 |
| 1x USB OTG |
| 1x Serial |
| 1x10/100/1000Mbit RJ45 Ports with connector for POE |
| 1x Audio-In |
| 1x Audio-Out |
| 1x W-LAN-connector |
| 1x HDMI |
| 1x GPIO Connector |

| Internal Connectors |
|------------------------------------|
| 1x SD-card |
| 1x SIM-card |
| 2x Serial |
| 4x TTL UART |
| 2x USB 2.0 |
| 18/24Bit LVDS |
| 6x GPIO (A20: 20x GPIO) |
| 1x Line-In |
| 1x Line-Out |
| 1x Amplifier for 2x 6W loudspeaker |
| 1x SATA-Port |
| 1x RTC |

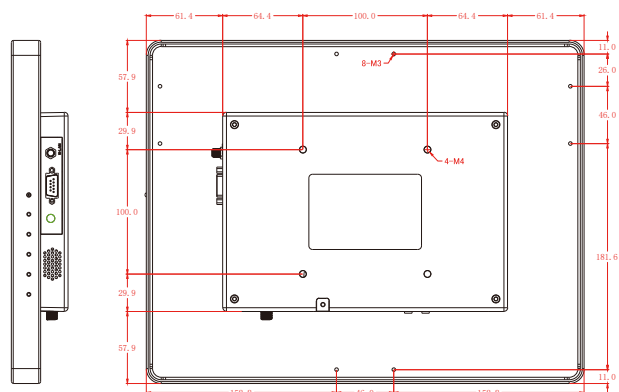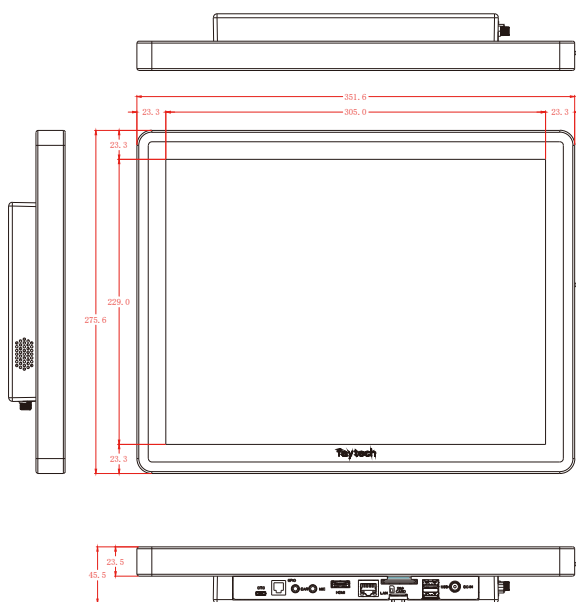

Corporate Headquarters

faytech Tech. Co., Ltd.
Building F., Hongmen Tech. Zone,
Jihua Rd., Shenzhen, China 518129

support@faytech.com
contact@faytech.com
www.faytech.com

China: +86 755 89580612
Germany: +49 551 82098660
USA: +1 646 205 3214