


43" Embedded PC Kiosk 4K (no touch)

FT43EPCRK3399




- Rockchip RK3399 64bit Hexa Core Processor Dual Cortex-A72, Quad Cortex-A53
- 4GB DDR3 RAM & 64GB eMMC module (uSD card)
- Supports Android up to version 9.X
- Integrated Bluetooth 4.0 and Wi-Fi
- 4K Ultra HD Resolution – 3840 × 2160
- Optically bonded Cover Glass to LCD Panel
- 1000+ cd/m² brightness for increased visibility
- Comprehensive IP65 protection
- 2 year guarantee

This **Embedded PC Kiosk** is the perfect solution for any occasion in the field of **Point of sales (POS), information display or digital signage**. Whether you wish to place it next to the brand new car in your store as information display, next to one of your highly promoted cosmetic products or at the entrance of your company building, this is the perfect solution for anyone who requires a **slim, easy-to-operate** and **modern looking A-Frame kiosk**! Besides this, it is easy to move around using the back wheels!

Powered by the powerful Rockchip RK3399 Mainboard with Hexa Core Processor Dual Cortex-A72, Quad Cortex-A53 and Mali-T860MP4 graphics. The Kiosk is equipped with 4GB DDR3 RAM, 64GB flash memory. As for network connection, the device is already integrated with Wi-Fi and Bluetooth.

Customization options are always possible, this includes change of connectors, color, added peripherals or any other customization.



Product name	43" Embedded PC Kiosk 4K (no touch)
Model number / EAN number	FT43EPCRK3399 / -

IP Rating	
IP65	

LCD Panel	
Screen diagonal (Inch/cm)	43/109.22
Display active screen size (cm)	94.09×52.93
Aspect ratio	16:9
Physical resolution	3840×2160
External maximum showable resolution - HDMI	3840×2160
Colours displayed	1.07B
Brightness (cd/m ²)	1000+
Contrast	4000:1
Typical reaction time Tr/ Tf (ms)	8/8
Visual Angle horizontal/vertical (°)	178/178
Backlight / Backlight Lifetime (hours)	LED / 50,000



Operation / Mechanical	
Operating Temperature (°C)	-10 ~ +60
Humidity Range (RH)	10% - 90%
Net weight (kg)	33.00
Gross weight (kg)	46.00 (incl. cartouage)
Housing material	Metal
Housing (mm) L × W × H	673.0 × 34.0 × 1470.3
Mounting	Aluminum stand

PC System	
CPU	Rockchip RK3399 64bit hexa Core Processor Dual Cortex-A72, Quad Cortex-A53
Graphic GPU	ARM® Mali-T860MP4, support OpenGL ES1.1/2.0/3.0
Audio	Integrated HI-FI 100dB Audio Codec Dual analog mic. 2x6W amplifier
Memory	4GB DDR3 RAM
Storage	64GB eMMC module (uSD card)
Network	10/100Mbps Network
OS	Android 9.0
Wireless Connection	Bluetooth 4.0 / Wi-Fi

Power	
Power Supply	100-240V ACDC active switching; 24V DC Out
Working Power (V)	24
Power Consumption (W)	170
Stand-By Consumption (W)	<1

External Connectors	
1x 24V DC-In	
2x USB 2.0	
1x RJ45	

Included in the Delivery	
Power Supply (see Power section)	
Short Installation Manual	
AC cable	
W-LAN antenna (RP-SMA female)	

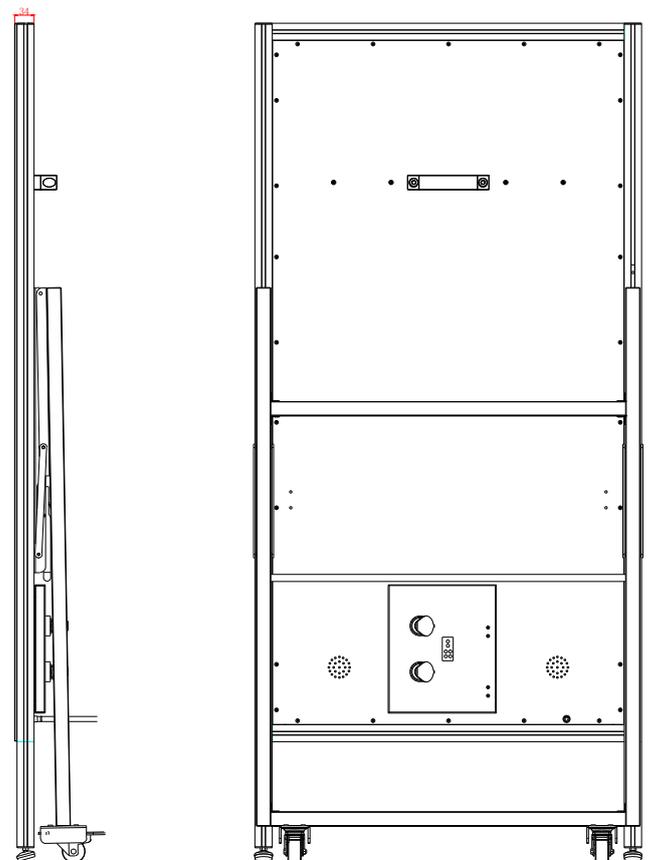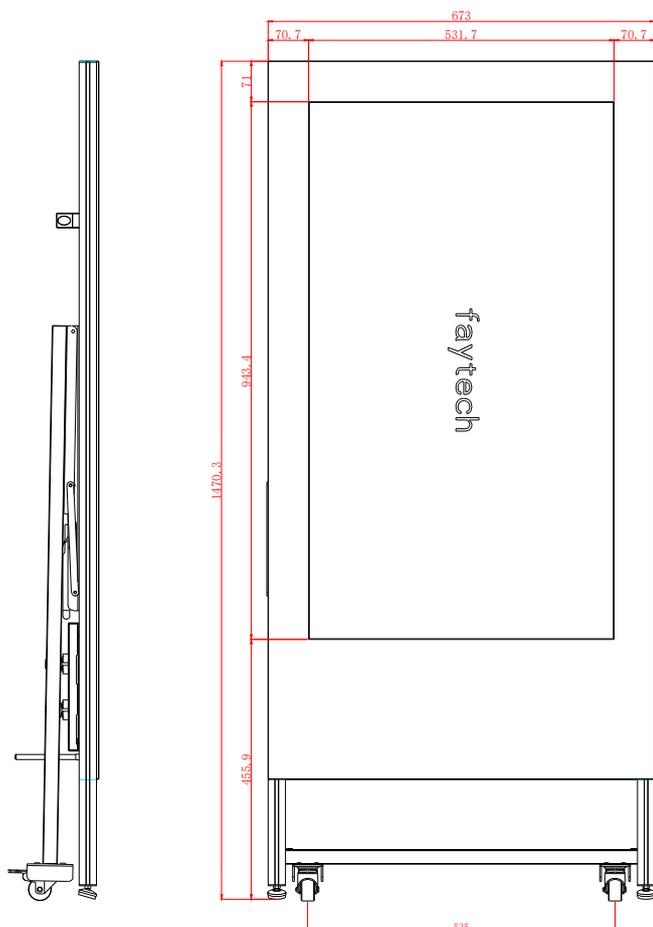

Tolerance: ± 1.5mm

Corporate Headquarters

faytech AG
 Bischhäuser Aue 10
 37213 Witzenhausen
 Germany

support@faytech.com
contact@faytech.com
www.faytech.com

China: +86 755 8958 0612
 Germany: +49 5542 30374 10
 USA: +1 646 205 3214
 India: +91 11 49707436
 Japan: +070 4127 5167