



Complete Touch & Non-Touch Display Solutions for the Restaurant and Food Service Industry

11.2022
faytech group


Attractive Advertising & Digital Signage



Hanging Window Signage



Waterproof Outdoor Signage

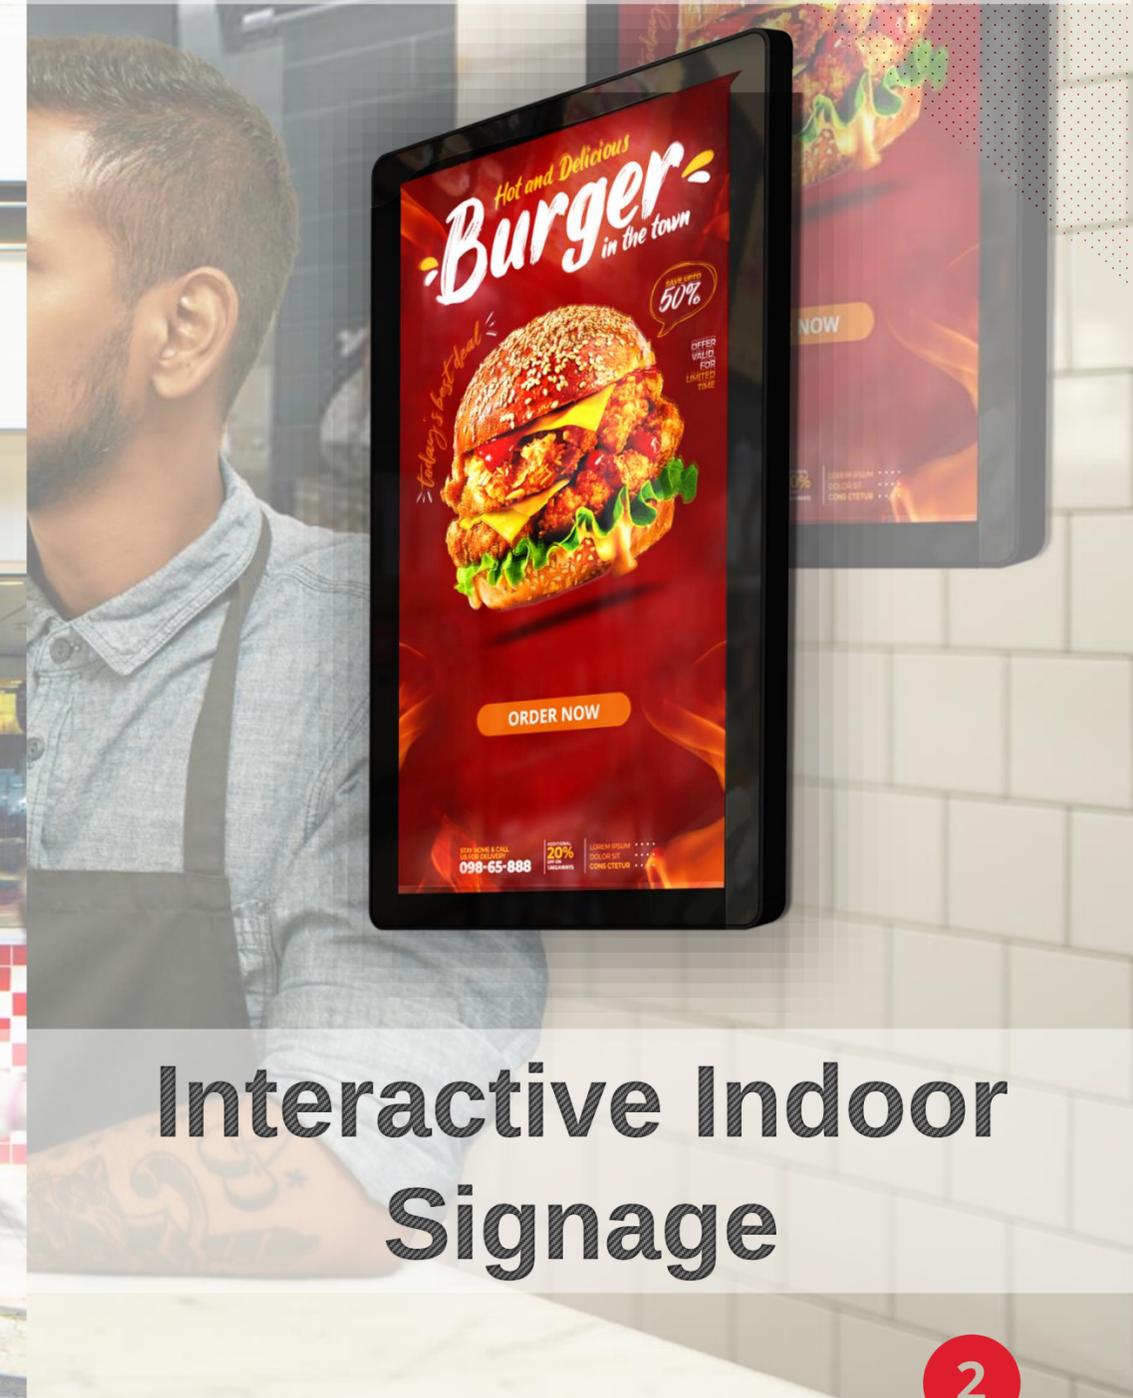

Interactive Indoor Signage

Attractive Advertising & Digital Signage

Size	24 - 55"
Resolution	Up to 4K
IP Class	IP40 - IP68
Brightness	500 - 2,500 cd/m ²
Frame Options	Rubber / Aluminum / Open Frame
Touch Options	PCAP 10-point multi-touch / non-touch
Coating / Etching	Kastus® / Anti-Glare
Operating Temperature	-10°C to +60 °C
Connectors (as Monitor)	With HDMI & DP
CPU (as PC)	x86 Intel / ARM / Amlogic
Memory (as PC)	Up to 32GB
Storage (as PC)	Up to 128GB

Size	24 - 55"
Resolution	Up to 4K
IP Class	IP65 - IP68
Brightness	1,000 - 2,500 cd/m ²
Frame Options	Aluminum / Open Frame
Touch Options	PCAP 10-point multi-touch / non-touch
Coating / Etching	Kastus® / Anti-Glare
Operating Temperature	-25°C to +75 °C
Connectors (as Monitor)	With HDMI & DP
CPU (as PC)	x86 Intel / ARM / Amlogic
Memory (as PC)	Up to 32GB
Storage (as PC)	Up to 128GB

Size	21.5 - 86"
Resolution	Up to 4K
IP Class	IP40 - IP65
Brightness	500 -1,000 cd/m ²
Frame Options	Rubber / Aluminum / Open Frame
Touch Options	PCAP 10-point multi-touch / non-touch
Coating / Etching	Kastus® / Anti-Glare
Operating Temperature	-10°C to +60 °C
Connectors (as Monitor)	With HDMI & DP
CPU (as PC)	x86 Intel / ARM / Amlogic
Memory (as PC)	Up to 32GB
Storage (as PC)	Up to 128GB

Complete Touch & Non-Touch Display Solutions for the Restaurant and Food Service Industry


Digital Menu Boards & POS Systems



Digital Menu Boards




POS Systems

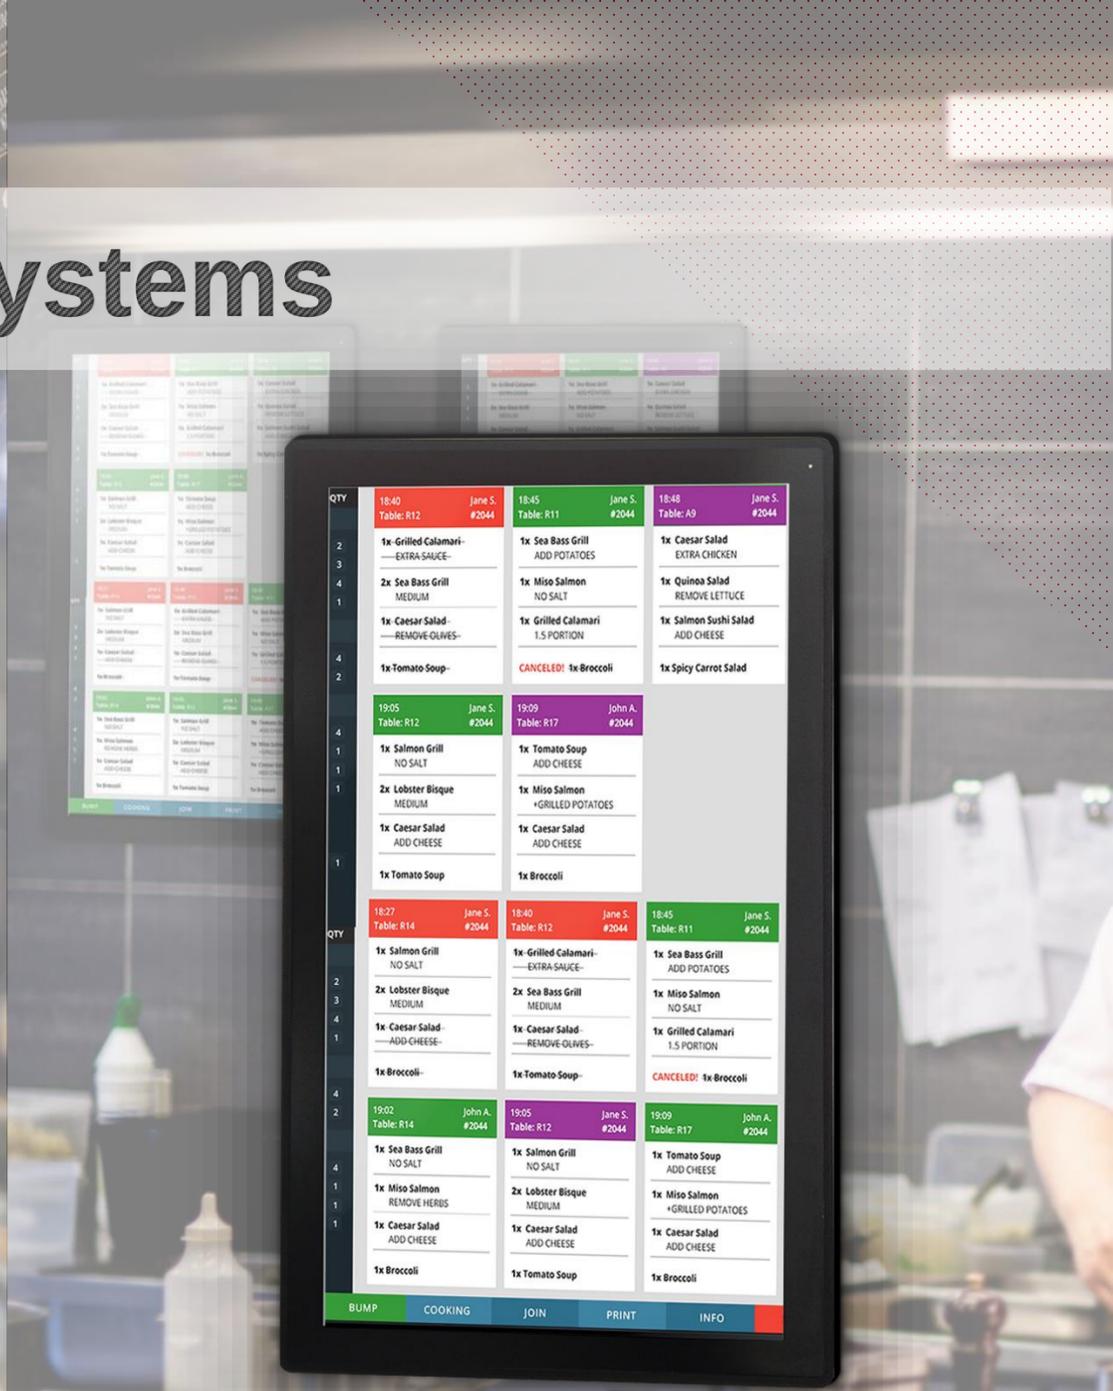

In-Kitchen Displays

Complete Touch & Non-Touch Display Solutions for the Restaurant and Food Service Industry

Digital Menu Boards & POS Systems

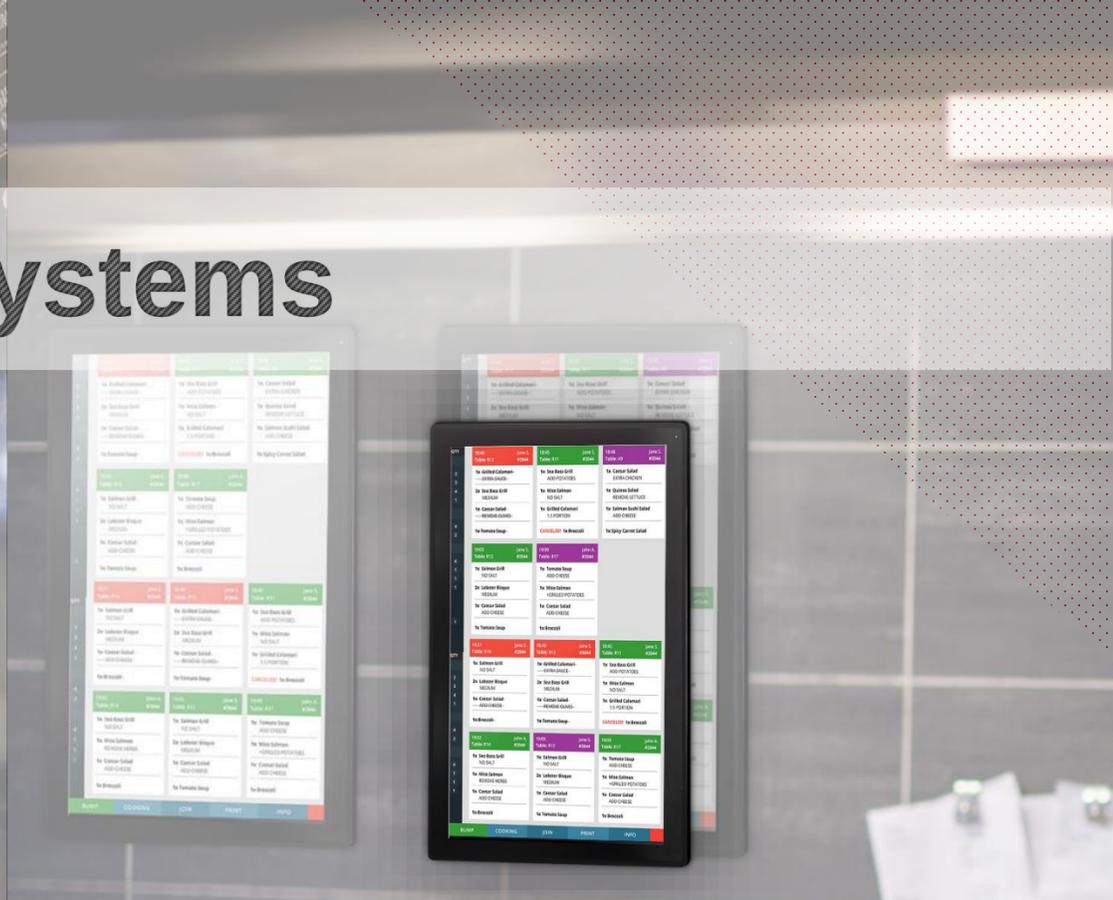


Size	24 - 86"
Resolution	Up to 4K
IP Class	IP40 - IP65
Brightness	500 - 1,500 cd/m ²
Frame Options	Rubber / Aluminum / Open Frame
Touch Options	non-touch
Coating / Etching	Kastus® / Anti-Glare
Operating Temperature	-10°C to +60 °C
Connectors (as Monitor)	With HDMI & DP
CPU (as PC)	x86 Intel / ARM / Amlogic
Memory (as PC)	Up to 32GB
Storage (as PC)	Up to 128GB

Size	7 – 21.5"
Resolution	Up to Full HD
IP Class	IP40 - IP65
Brightness	500 - 1,000 cd/m ²
Frame Options	Rubber / Aluminum Frame
Touch Options	PCAP 10-point multi-touch
Coating / Etching	Kastus® / Anti-Glare
Operating Temperature	-10°C to +60 °C
Connectors (as Monitor)	With HDMI & DP
CPU (as PC)	x86 Intel / ARM / Amlogic
Memory (as PC)	Up to 32GB
Storage (as PC)	Up to 128GB

Size	15.6 - 55"
Resolution	Up to 4K
IP Class	IP40 - IP65
Brightness	500 -1,500 cd/m ²
Frame Options	Rubber / Aluminum / Open Frame
Touch Options	PCAP 10-point multi-touch / non-touch
Coating / Etching	Kastus® / Anti-Glare
Operating Temperature	-10°C to +60 °C
Connectors (as Monitor)	With HDMI & DP
CPU (as PC)	x86 Intel / ARM / Amlogic
Memory (as PC)	Up to 32GB
Storage (as PC)	Up to 128GB

Complete Touch & Non-Touch Display Solutions for the Restaurant and Food Service Industry

Product Features



Sizes Range from 7 - 86"
4:3, 5:4, 16:9, 16:10 ratio



Touch Functionality
Capacitive 10-finger multi-touch or non-touch option



Simple & Easy Installation
VESA & Clamps make for easy installs in all environments



High Brightness
500-2,500+ cd/m², for indoor & outdoor applications

Product Features



Tough Ruggedized IP65 Design

IP65+, IK08, 8H cover glass




Built for 24/7 Operation

LED backlight tested to last more than 100k hours of non-stop operation




High Quality Optical Bonding

Provides the sharpest most vivid display image in the industry



Slim & Lightweight Design

Simple, sleek, and light frame designs are easy to hang or integrate in any setting



Fully Customizable for any Installations

Case, connectors, peripherals etc.



Frame Options & IP65 Waterproofing

Customized Frame Options:

ruggedized rubber

open

aluminum

custom



IP65 Waterproofing:




IP65 connectors with covers




IP65 'All-in-One' Cable

Customized Connection Options:

Video connectors



HDMI



DisplayPort



VGA




DVI-D
(optional)

Touch connectors



USB-B

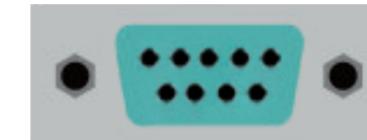

Serial touch
(optional)

Diverse connectors



Audio jack



DC-In (12V)
or
DC-In (24V)



DC-In (8~36V)
(optional)



Mainboard Options



Intel Mainboards

Elkhart Lake (J6412/N6415/x6211E)

Apollo Lake (N3350/N4200)


Tiger Lake U (i5-1115G4E)

Kaby Lake U (i3-core/i5-core/i7-core)

Memory: 4/6/8/16/32 GB

Storage: 128 GB

OS:



Embedded Mainboards


ARM (V40)

Amlogic (A311D/S905D3)

Memory: 2/4 GB

Storage: 8/16/64 GB

OS:

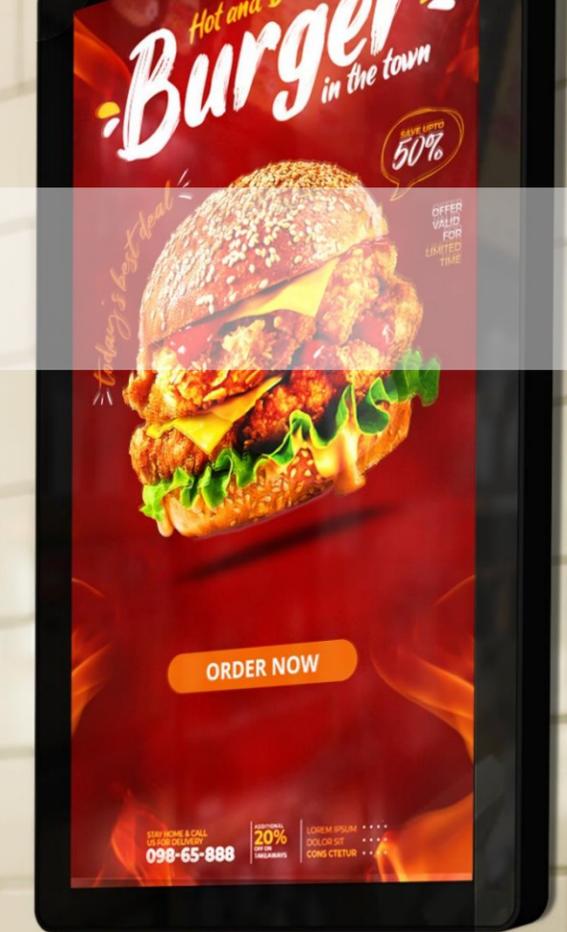

Connectors:

USB, Serial, RS422, RS485, HDMI, DP
RJ45, COM, Audio, RJ50, Micro SD (+ custom)


Coating & Etching Options



Anti-viral & anti-bacterial Kastus® coating

Available upon request

- Permanently blocks up to 99.99% of bacteria (incl. Human Coronavirus)
- Active 24/7, lasts complete lifecycle of product
- Burned-into glass (effect does not deteriorate)

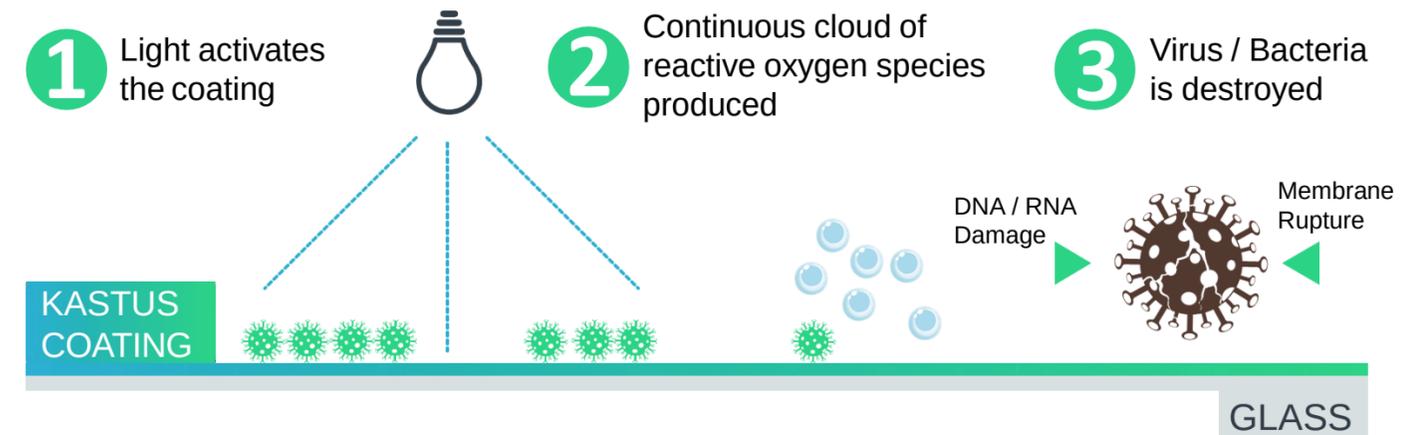

Anti-glare (chemical etching)

Standard for all devices

- Reduces glare and reflections
- Resilient to scratches and fingerprints



UV, IR & anti-fingerprint coating

Available upon request, perfect for various applications


Digital Signage Solutions Perfect for all Settings

Retrofits for Existing Restaurants:

- Replaces boring traditional signage
- Easy to mount, hang, or integrate anywhere
- Brightness to suit any space or environment
- Fully customizable solutions including split screens and odd shapes/sizes

Designed to Spec for New Locations:

- Customized screen size, brightness and hardware based on application
- Strong R&D team for new concepts & products
- Able to design and scale up new projects & products from scratch
- Fully customizable

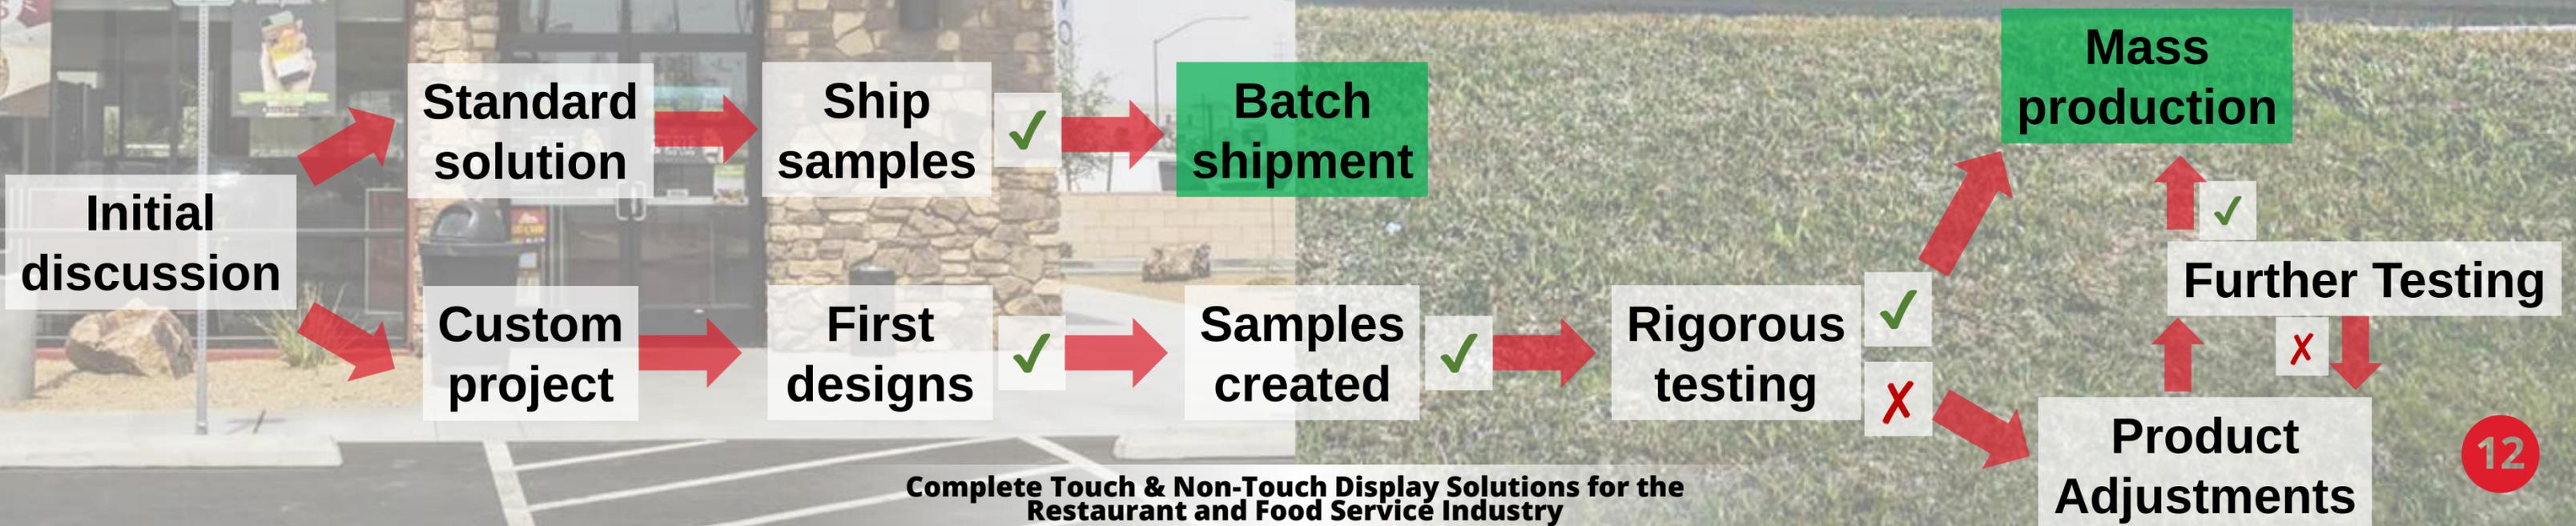

THANK YOU
faytech

www.faytech.com

