

15.6" Ultra Slim LCD Monitor (Type-C)
 FT156SLMOB



Preliminary Datasheet

- High definition LCD panel (1920×1080)
- 2mm cover glass with 7H surface hardness
- 12.5mm bezel on sides and 11.2mm on top
- Weight of ~1.1kg and thickness of 14.4mm
- Power and video over a single USB Type-C
- Optically bonded cover glass to LCD panel
- Anti-glare surface treatment (chemical etching)
- VESA 75 mounting option (with cable space)
- 2 year guarantee (24/7 operation)






faytech's Ultra Slim LCD Monitors are the perfect choice for retail, signage and business applications. It is manufactured to bring out the best display quality, vibrant colors and touch functionality while still allowing for a rugged and tough overall design. It is equipped with a single USB Type-C for power and video functionality.

This device has an optically bonded cover glass to LCD panel, which will improve the stability, reduce the reflection, increase the viewing angle, and enhance the perceived brightness. It also provides resistance to dust particles and shows a better image in general.

It is the perfect display solution for digital signage, POS systems, transportation, industrial automation and in areas such as classrooms, meeting rooms, shopping malls, hotels and more.

Legend / Notes	
Applicable to version 1	(v1)
Applicable to version 2	(v2)
Applicable to all Versions	None



Product name				15.6" Ultra Slim LCD Monitor (Type-C)			
Article code				FT156SLMOB			
Global Article Code	European Article Code	Release date (DIM7)	Version*	Global Article Code	European Article Code	Release date (DIM7)	Version*
3030521747	4010081202	01/03/2026	v1				

IP Rating	
IP40	

LCD Panel	
Screen diagonal [Inch/cm]	15.6/39.6
Display active screen size [mm]	344.16×193.59
Pixel pitch [mm]	0.17925×0.17925
Aspect ratio	16:9
Physical resolution	1920×1080
Colours displayed	16.7M
Brightness [cd/m²]	300
Contrast	800:1
Typical reaction time Tr/ Tf [ms]	15/15
Visual Angle horizontal/vertical [°]	170/170
Backlight / Backlight Lifetime [hours]	LED / min. 15,000



External Connectors	
1x USB Type C (Power & Video)	

Cover Glass	
Glass Thickness [mm]	2.0
Impact Rating	IK07
Surface Hardness	7H
Surface Treatment	Anti-glare (chemical etching)
Glass Strengthening	Chemically Strengthened

Operation / Mechanical	
Operating Temperature [°C]	0 ~ +50
Storage Temperature [°C]	-10 ~ +60
Humidity Range [RH]	10% - 90%
Net weight [kg]	~1.10 kg
Gross weight [kg]	~2.00 kg
Housing material	Aluminum
Housing [mm] L × W × H	370.2 × 222.8 × 14.4
Mounting	VESA 75

Power	
Working Power (V)	5-20V
Power Consumption (W)	6.5
Stand-By Consumption (W)	<0.5

Included in the Delivery	
USB Type-C Cable	

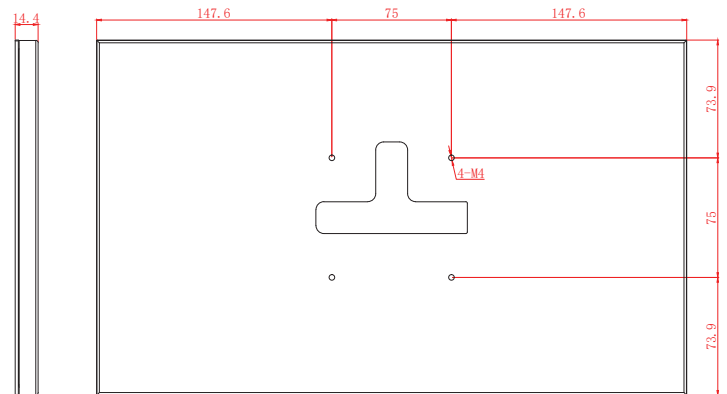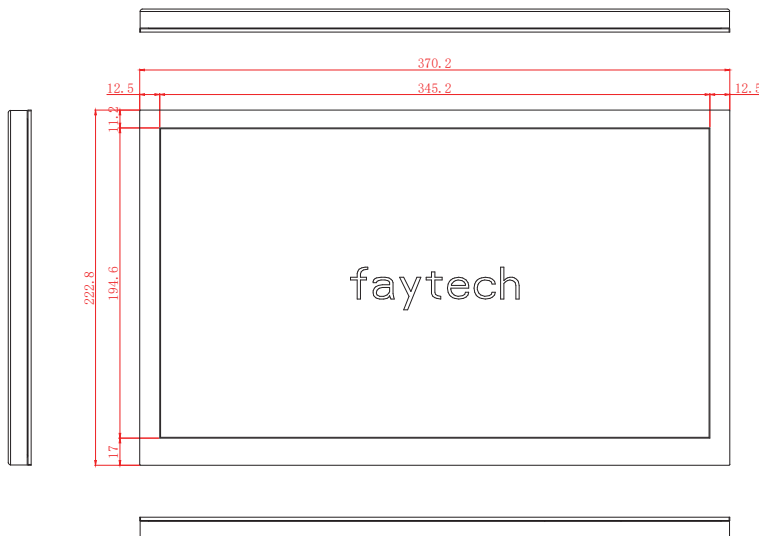

Update Notes:

* Only the latest version can be ordered, previous versions are only for historic reference.

Version:

Changes:

v1

-

First version

Headquarters

faytech Tech. Co., Ltd. | Fl. 2, Bldg. 8, Winlead Intelligent Park | Shenzhen, China | www.faytech.com | +86 755 89580612 | sales@faytech.com

USA Office

faytech North America | 237-239 West 29th Street, Ground Floor NY 10001 | New York, USA | www.faytech.us | +1 646 843 0877 | sales@faytech.us

Japan Office

faytech Inc. | 6th floor CI building 1-7-11, Higashinohonbashi, Chuoku | Tokyo, Japan | www.faytech.com | +81 3 5809 3937 | sales@faytech.jp

India Office

Faytech Private Limited | 3/16 Shanti Niketan,110021 | New Delhi, India | www.faytech.com | +91 11 49707436 | sales@faytech.co.in

South-Korea Office

Deutsche Faytech Korea | #501, GBSA, 107 Gwanggyoro, Yeongong-gu, Suwon-si, 16229 | Gyeonggi-do, Republic of Korea | www.faytech.kr | +82 10 3479 1815 | sales@faytech.kr